


# Keystone Jack Cat6A

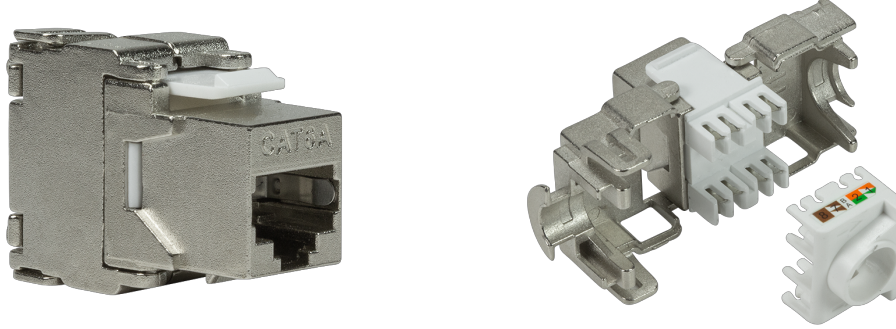

## Key Features :

- RJ45 Keystone Jack with gold plated pins.
- Cat6A Class EA 500 MHz, 10 Gbit Ethernet
- Snap-in mounting for patchpanel, outlet etc.
- 180° cable connection, butterfly type
- For AWG 22-24 solid wire
- Max cable diameter : 5.5 - 8.5 mm
- weight : 30 gr
- Fully shielded housing
- 17.4 mm width
- TIA/EIA 568 & SO/IEC 11801 permanent link
- Supports PoE, PoE+ and PoE++


## Order Information

Order code :

**LKJF6A1T**

C6A FTP Keystone Jack

EAN : 5904014201765

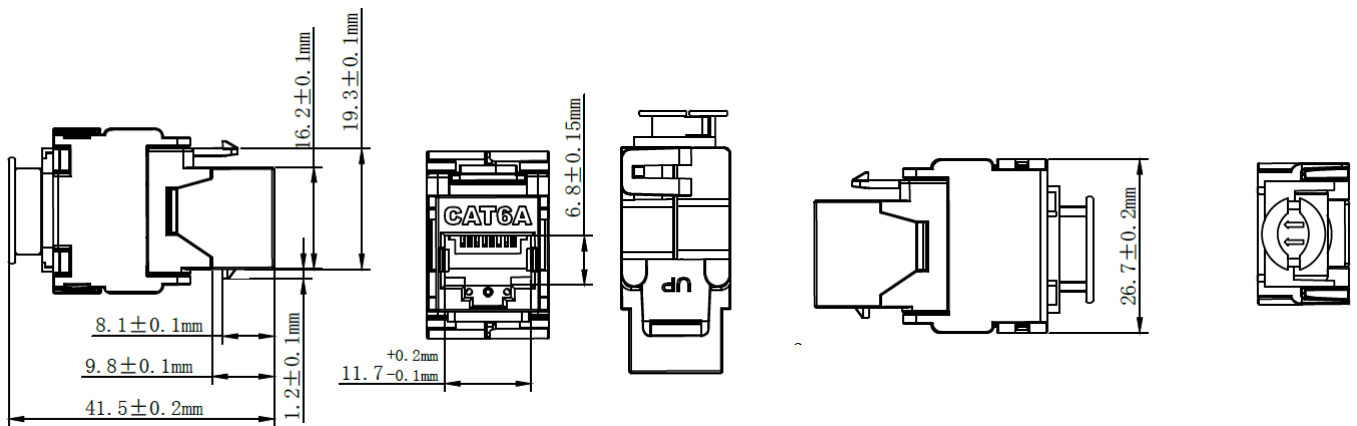

### NOTES:

#### ELECTRICAL:

1. CONTACT RESISTANCE : 20M OHMS MAX
2. INSULATION RESISTANCE : 500M OHMS MIN @ 500V DC
3. WITHSTAND VOLTAGE : DC1000V AC700V RMS 60Hz, 1MIN
4. CAT. 6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 C.2  
ISO/IEC 11801:2010 CLASS EA

#### ENVIRONMENTAL:

1. STORAGE : -40° TO+70°
2. OPERATION : -10° TO+60°

#### MECHANICAL

1. SHIELD MATERIAL: ZINC ALLOY
2. IDC MATERIAL: PC TERMINAL:PHOSPHOR BRONZE, TIN PLATING
3. RJ45 CONTACT LIFE: 750 TIMES MIN
4. IDN LIFE : 250 TIMES MIN
5. RJ45 DIMENSION:11.9MM\*9.8MM

PoE per IEEE 802.3af, PoE+ per IEEE 802.3at, PoE++ per IEEE 802.3bt

#### TYPE

1. SHIELDED CAT. 6A KEYSTONE JACK
2. COLOUR:SILVERY WHITE

RoHS2.0 & REACH COMPLIANT

