


# Keystone Jack Cat6A

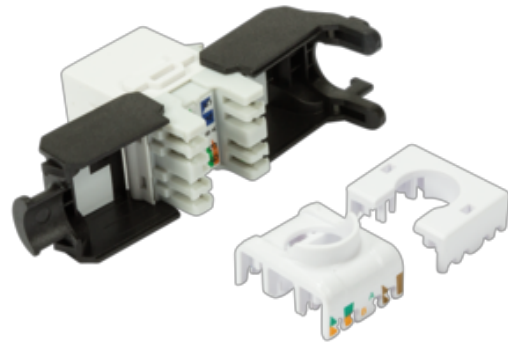






## Key Features :

- RJ45 Jack with gold plated pins.
- Snap-in mounting for patchpanel, outlet etc.
- Conform to TIA/EIA 568C.2 & ISO/IEC 11801
- T568 A/B Wire Code for AWG 22-26 Cable
- PoE and PoE+ according to IEEE802.3af/at
- weight : 12.4 gr
- Class EA - 500 MHz
- Unshielded
- Punch down & Tool Free
- Selling unit : polybag 8 pcs

## Order Information

Order code :

**LKJU6A1T** C6A UTP (8 pcs) EAN : 5904014200775

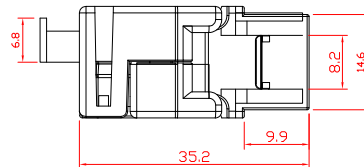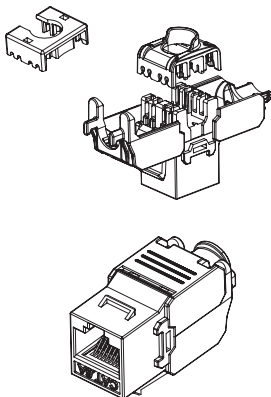

### NOTES:

#### ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

#### ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

#### MECHANICAL:

1. HOUSING MATERIAL:PC
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE  
STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE  
T=0.50mm WITH TIN PLATING
6. RJ45 JACK ;IFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN
8. WIRE:AWG 22-26

									Item No.	LKJU6A1T	
SYM	Number	Bill No. of Alteration	Signature	Date	Material	Angles Projection	Size	Scale	Unit	Part Name	ERP Part No.
Drawn	Ding jian bo	2015.12.29					A4	X:1	mm	UTP Cat6a Keystone Jack	
Checked	Ge pei jun	2015.12.29									
Approved	Wang wei jun	2015.12.29				Sheet	1 OF 1	Version:	A/0		